




# City of Palm Springs

Department of Building & Code Enforcement  
3200 East Tahquitz Canyon Way, Palm Springs CA 92262  
PO Box 2743, Palm Springs CA 92263  
Tel 760.323-8242 P Fax 760.322.8360 P TDD 760.864.9527  
[www.palmsprings-ca.gov](http://www.palmsprings-ca.gov)

## Decorative Infill Block Wall 2016


Running or Stacked Bond.  
**MAY NOT BE USED AS A POOL BARRIER**

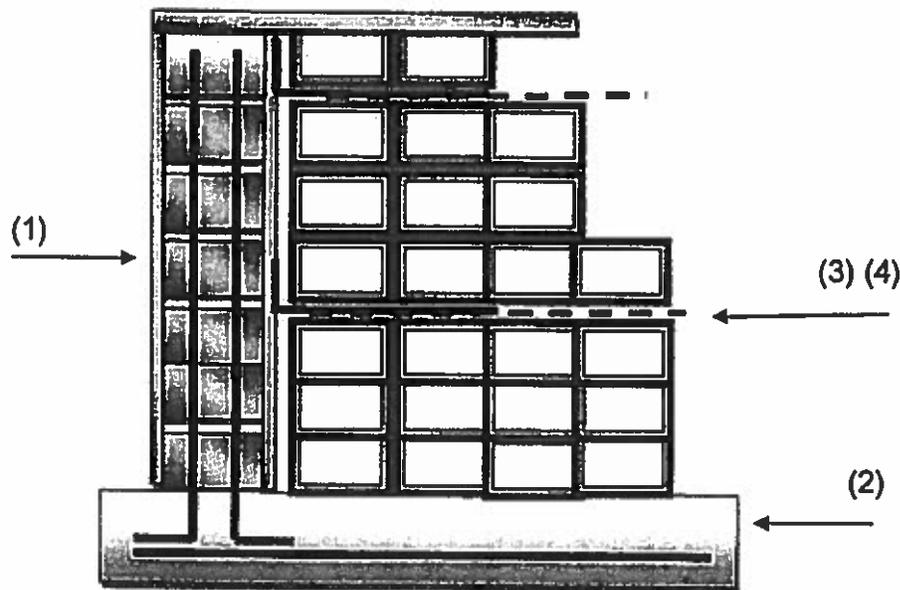


### Notes:

1. City Standard wall or Pilaster detail at each end of Infill Section. Min. 12" X 12" pilaster or 24" x 8" wall section.
2. Twelve inch wide by one foot thick min. footing under infill. 2 # 4 continuous.
3. 20 gauge perforated Panel Anchor 6 " leg by 18" long. 1.75 " wide, every third block, maximum 24 inches o.c. Attach six inch leg of Panel Anchor to pilaster or wall with two 3/16 X 1.25 masonry screws.
4. H (ladder) 9 gauge wire reinforcing. Over Panel anchor in mortar bed. 6 inch lap min. Full length of wall. Inspection is required at each reinforcing mortar joint.
5. Maximum Infill dimension for each section is fifteen feet Max length by six feet high. (Refer to Planning Department for maximum heights based on set back)

**INFILL BLOCK WALL ANCHOR AND REINFORCING DETAILS**

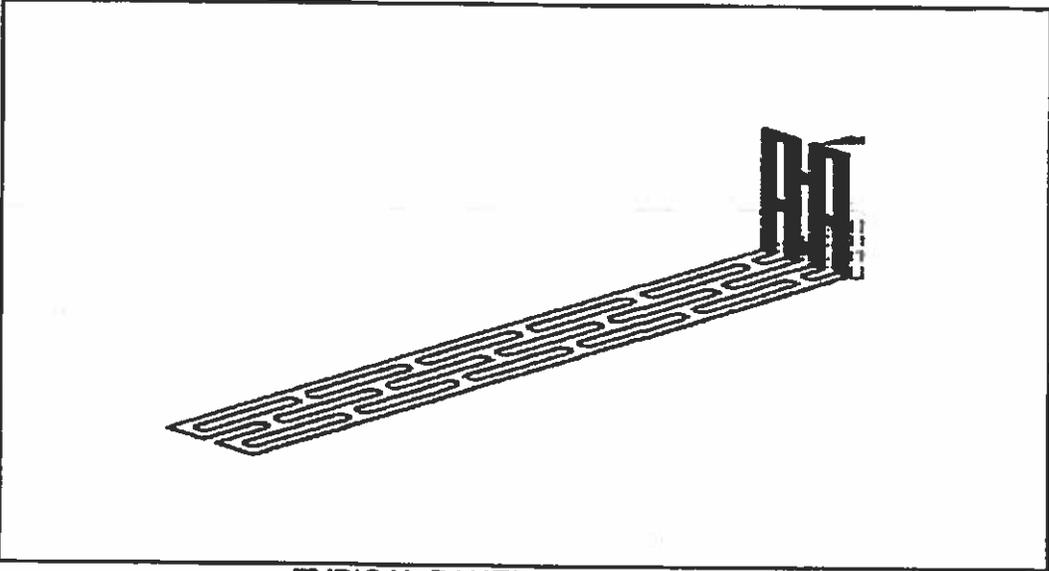

TYPICAL PANEL ANCHOR

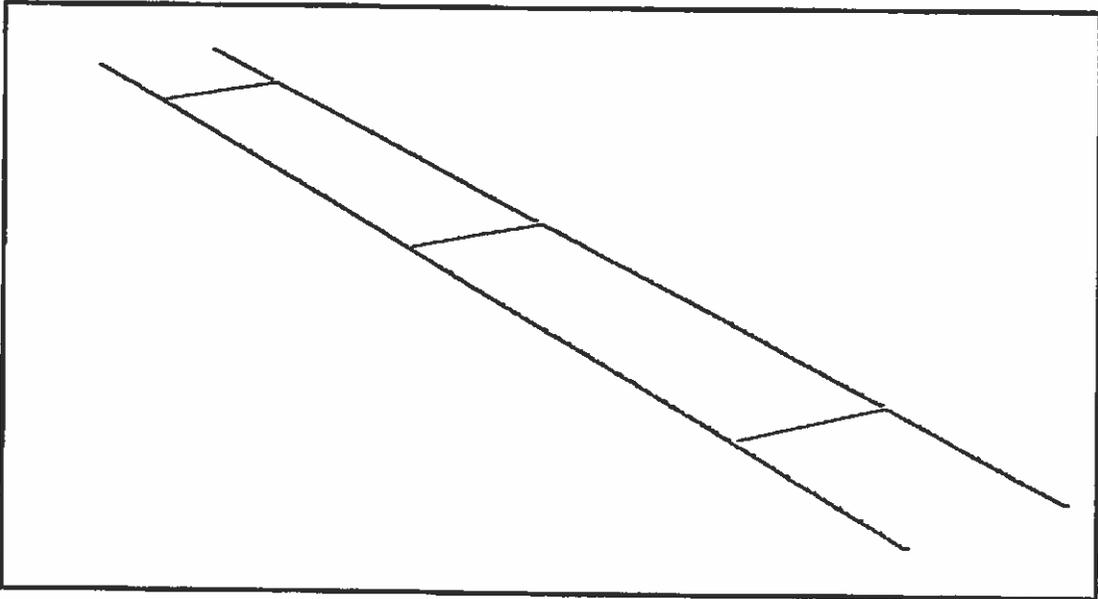

H OR LADDER TYPE REINFORCING