



NO.	REVISIONS	APPROVED	DATE

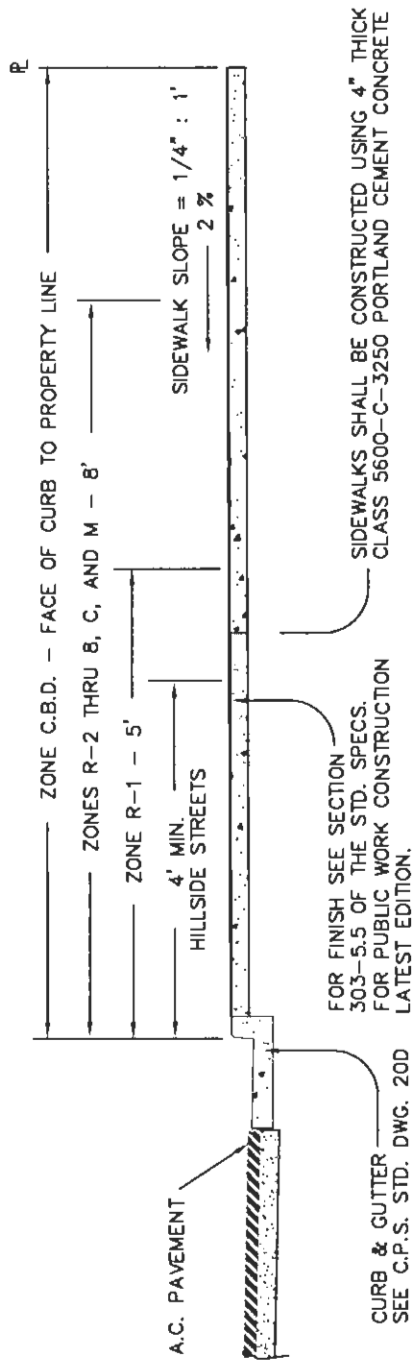

NOTES:


- FOR EXPANSION JOINTS SEE SECTION 303-5.4.2 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, LATEST EDITION. THE SPACING FOR 1" DEEP WEAKENED PLANE JOINTS SHALL BE 10 FEET.
- DECORATIVE SIDEWALKS SHALL BE ALLOWED IF STRENGTH AND TEXTURE ARE EQUAL TO OR GREATER THAN THE PROVISIONS OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, LATEST EDITION, AND ARE APPROVED BY THE PLANNING COMMISSION.
- PALM CANYON DRIVE FROM TRAMWAY TO EAST CITY LIMITS - SIDEWALK FROM FACE OF CURB TO PROPERTY LINE.
- INDIAN CANYON DRIVE FROM CAMINO PAROCOLA TO VIA ESCUELA - SIDEWALK FROM FACE OF CURB TO PROPERTY LINE.
- SIDEWALKS IN EXCESS OF 5% SLOPE, SHALL HAVE A MIN. 6' X 6' LANDING AREA EVERY 400' AT A 2% SLOPE.
- A MINIMUM 48" CLEAR PATH OF TRAVEL SHALL BE PROVIDED AT ALL OBSTRUCTIONS.
- MODIFICATIONS BASED ON SITE-SPECIFIC CONDITIONS SHALL BE REVIEWED BY THE DEVELOPMENT COMMITTEE.
- SEE ALSO BIKEWAY REQUIREMENTS. COLORED CONCRETE IS REQUIRED FOR SIDEWALKS ALONG DESIGNATED STREETS.
- FOR ZONING SEE THE OFFICIAL ZONING MAP OF THE CITY OF PALM SPRINGS.

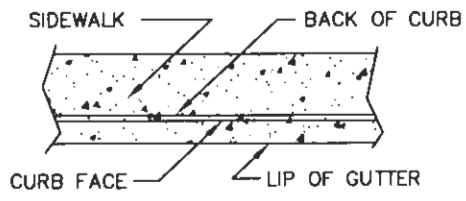

SHOWN THUS ON PLAN

CITY OF PALM SPRINGS
PUBLIC WORKS & ENGINEERING DEPARTMENT

SIDEWALK WIDTHS

APPROVED: 	DATE: <u>11/6/20</u>
CITY ENGINEER	28931 R.C.E.
DRAWN BY: G.F.F.	FILE NO. STANDARDS
CHECKED BY: M.L.F.	DWG. NO. 210