
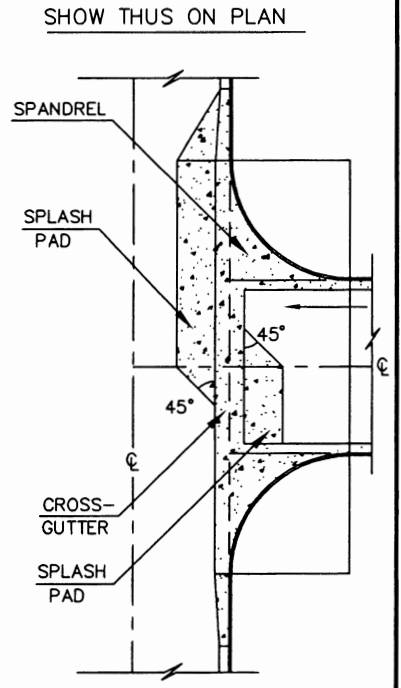


NO.	REVISIONS	APPROVED	DATE

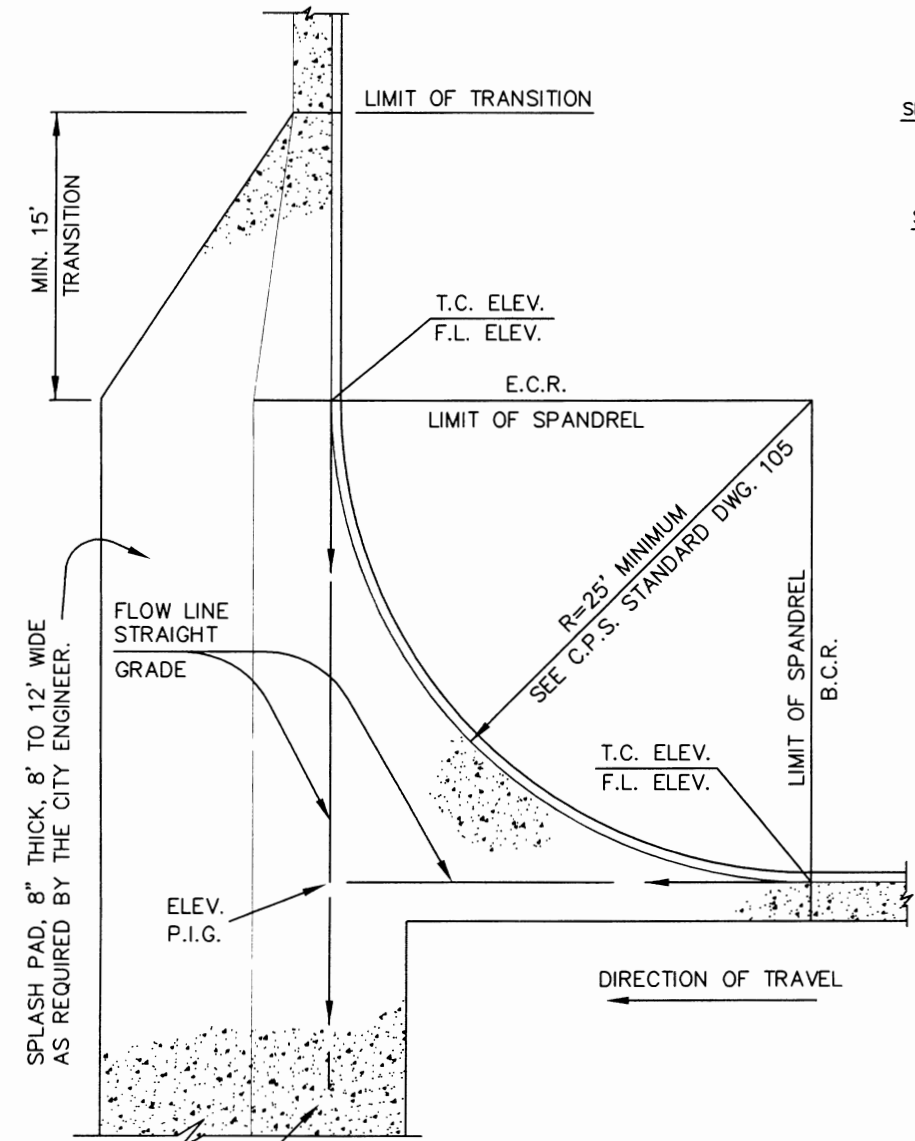

**NOTES:**

1. WEAKENED-PLANE JOINTS SHALL BE INSTALLED AT BEGINNING AND END OF SPANDREL AND TRANSITION.
2. SPANDREL, CROSS GUTTER AND TRANSITION SHALL BE CONSTRUCTED WITH 8" THICK CLASS 560-C-3250 PORTLAND CEMENT CONCRETE.
3. CURB FACE HEIGHT SHALL BE 6" OR 8" AS SHOWN ON DRAWING AND CONSTRUCTED MONOLITICALLY WITH ADJACENT SPANDREL.
4. "W" SHALL BE SPECIFIED ON THE PLANS AS 6' OR 8' PER C.P.S. STANDARD DWG. 200.
5. SEE C.P.S. STD. DWG. 212 FOR ADDITIONAL REQUIREMENTS.
6. SEE C.P.S. STD. DWG. 110 FOR PAVEMENT REQUIREMENTS.

<b>CITY OF PALM SPRINGS</b> PUBLIC WORKS & ENGINEERING DEPARTMENT  <b>CURB RETURN, SPANDREL AND CROSS-GUTTER</b>	APPROVED: <i>[Signature]</i>	DATE: 12/10/07
	CITY ENGINEER	28931
DRAWN BY: G.F.F.	FILE NO. STANDARDS	
CHECKED BY: M.L.F.	DWG. NO.	206